


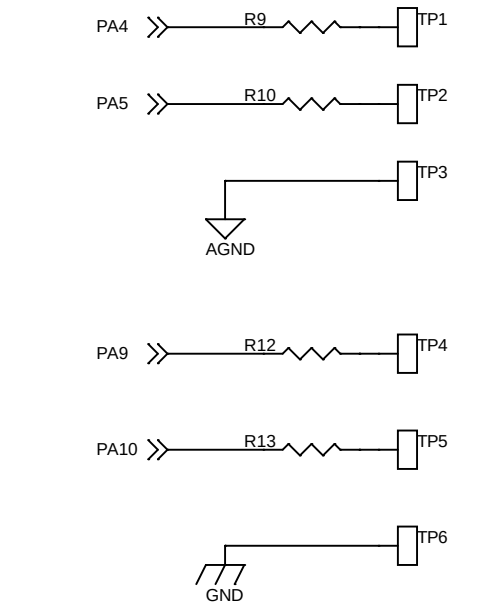


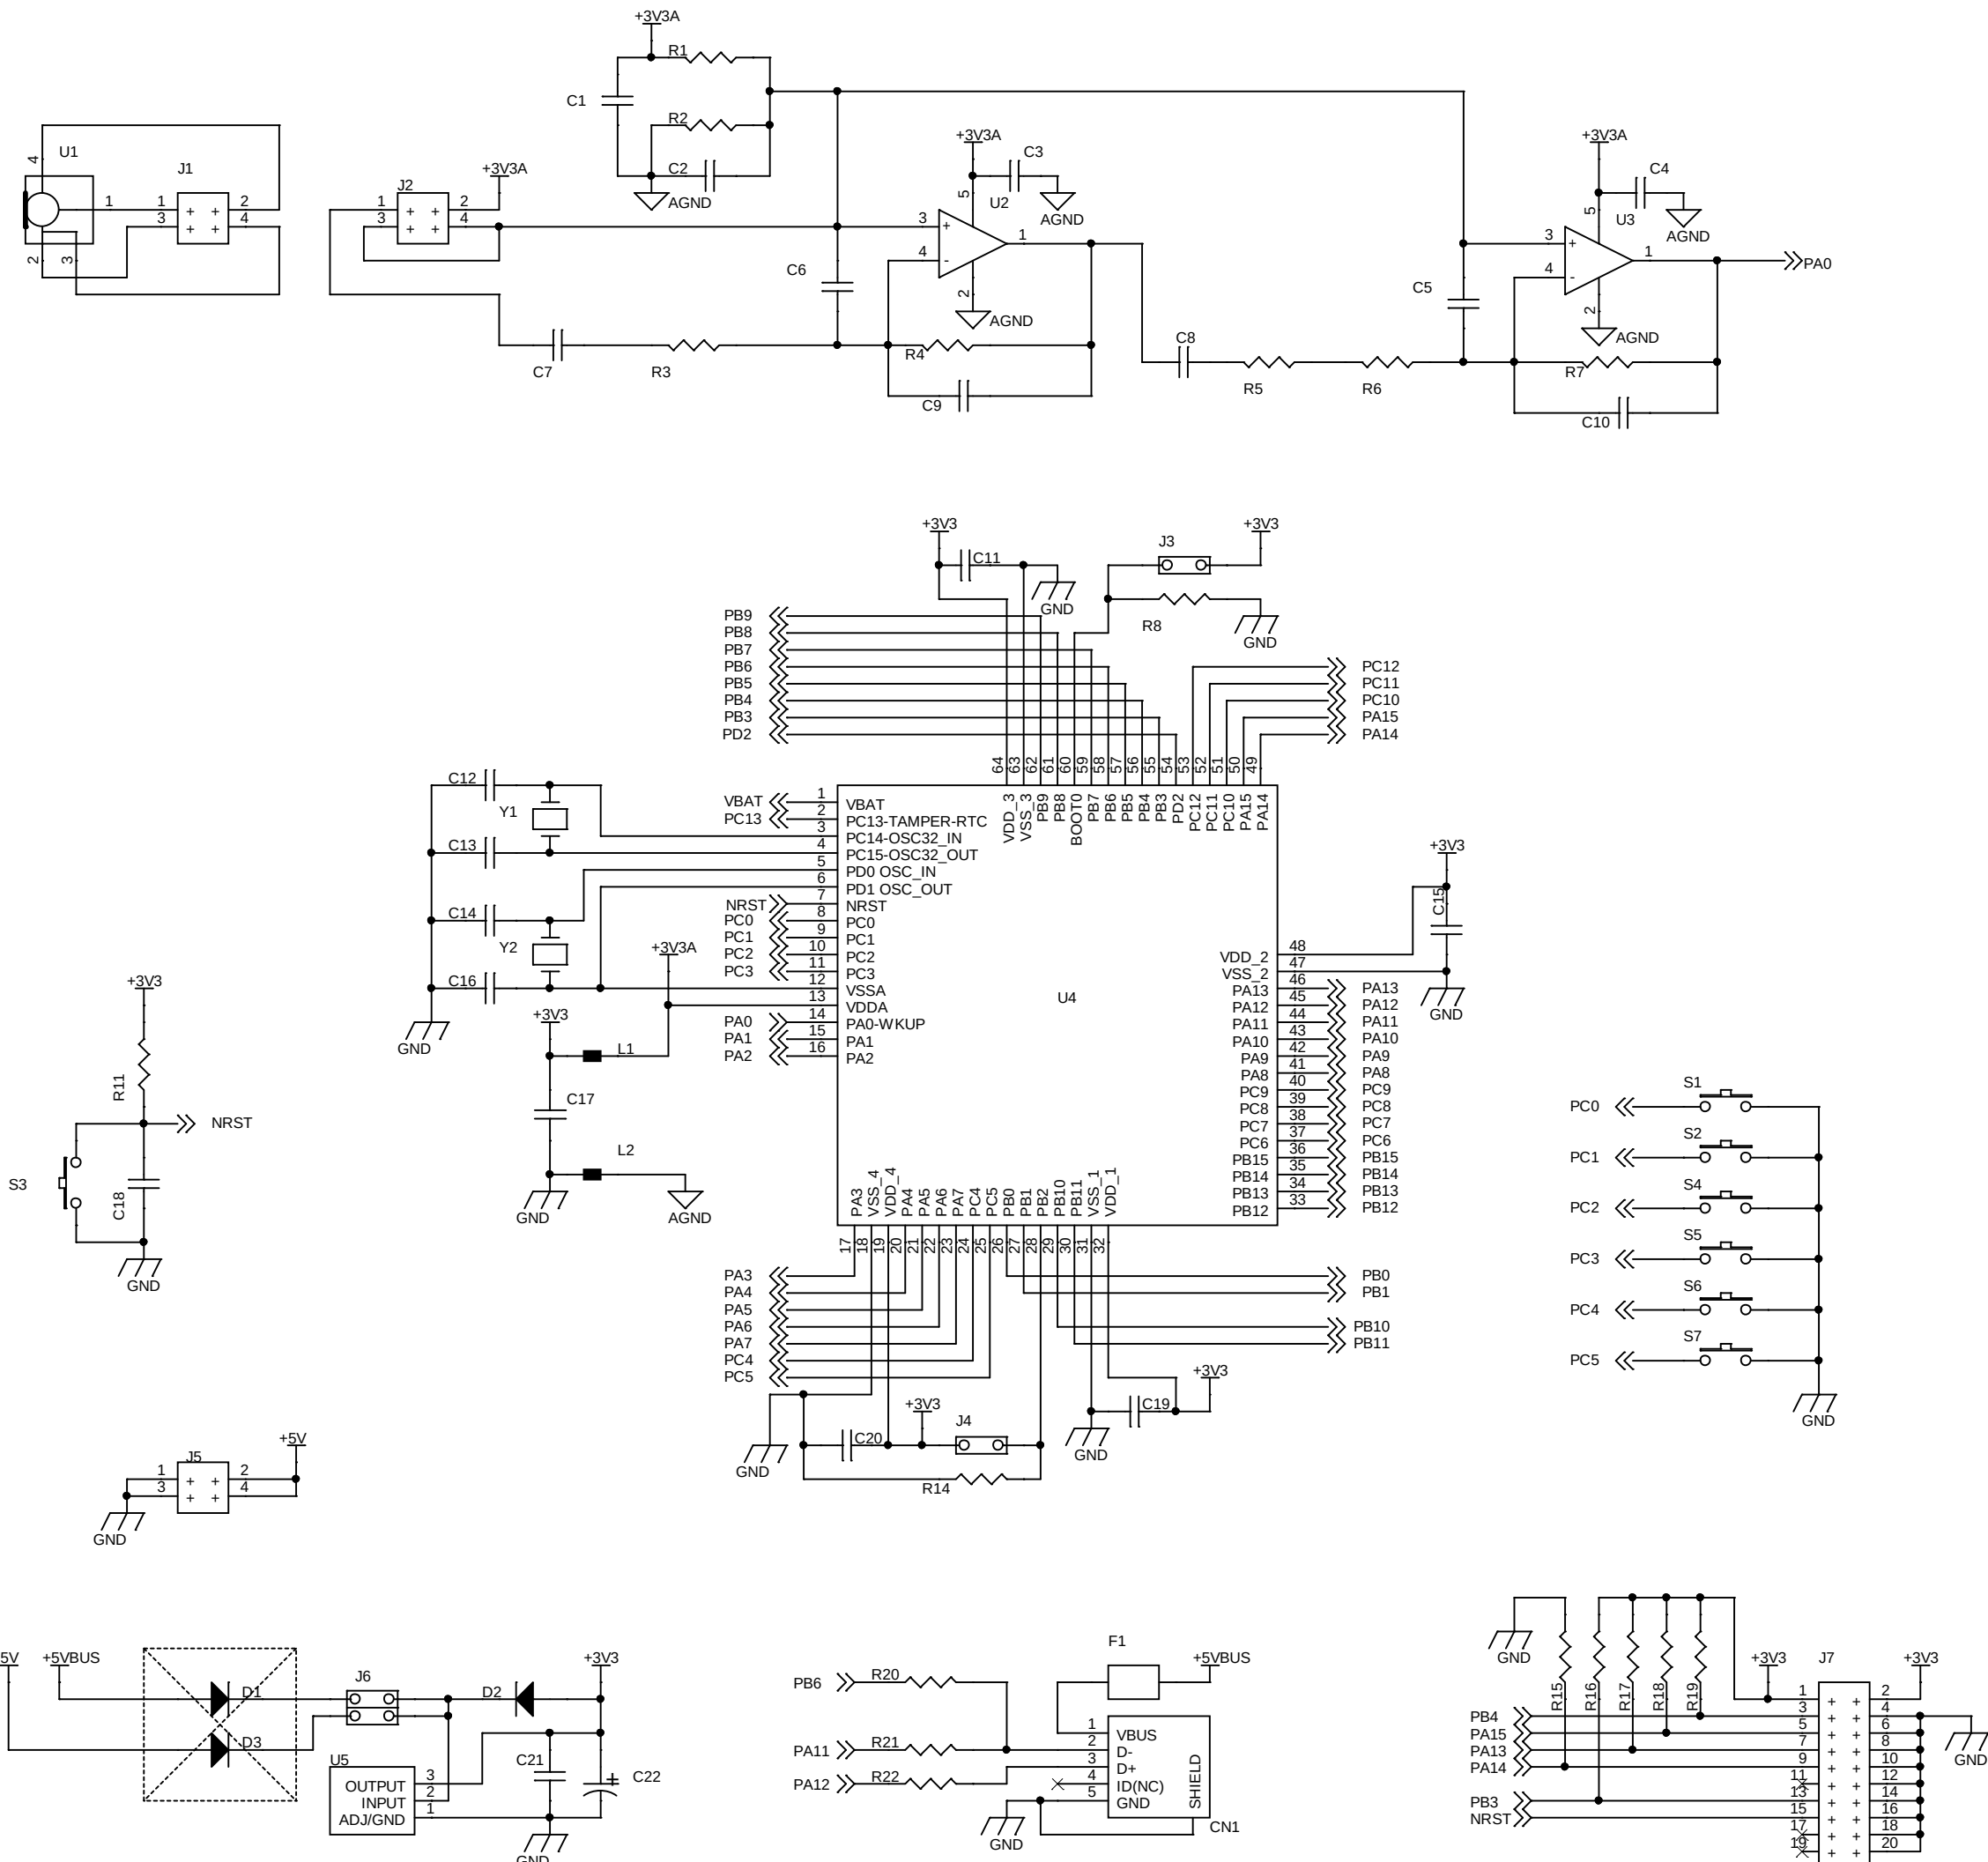

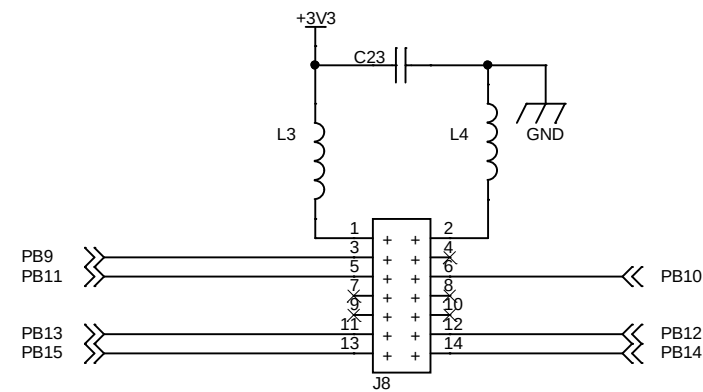


PIN-HEADER-PIN# = FLAT-CABLE-WIRE#

| WIRE# | OLED (PIN#) | CPU  |
|-------|-------------|------|
| 3     | RS ( 4 )    | PB9  |
| 6     | R/W ( 5 )   | PB10 |
| 5     | E ( 6 )     | PB11 |
| 12    | D4 ( 11 )   | PB12 |
| 11    | D5 ( 12 )   | PB13 |
| 14    | D6 ( 13 )   | PB14 |
| 13    | D7 ( 14 )   | PB15 |

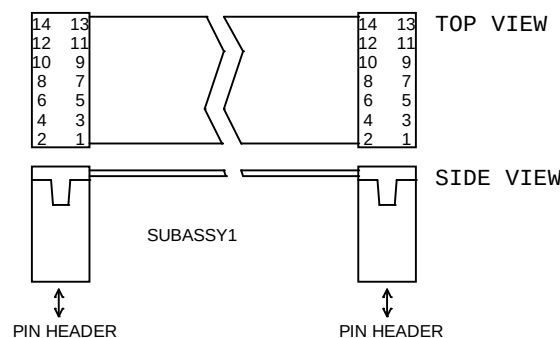

# ■寸法図

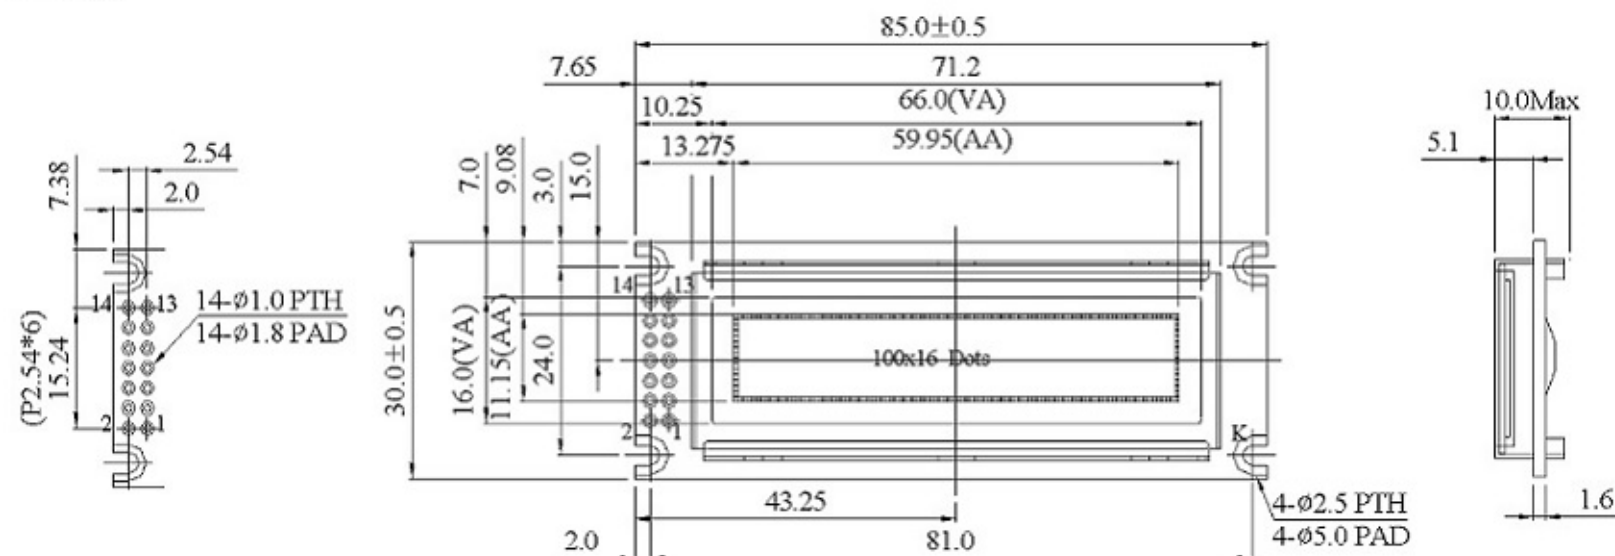

| PIN# | SIG. | FUNC                    |
|------|------|-------------------------|
| 14   | DB7  | Data bit7               |
| 13   | DB6  | Data bit6               |
| 12   | DB5  | Data bit5               |
| 11   | DB4  | Data bit4               |
| 10   | DB3  | Data bit3               |
| 9    | DB2  | Data bit2               |
| 8    | DB1  | Data bit1               |
| 7    | DB0  | Data bit0               |
| 6    | E    | Chip Enable             |
| 5    | R/~W | Read/~Write             |
| 4    | RS   | Select Instruction/Data |
| 3    | NC   | N.C.                    |
| 2    | VSS  | GND                     |
| 1    | VDD  | VDD (3V - 5V)           |

表示器 裏側にピンヘッダ取付の場合

ピンヘッダ PIN#

1 ⇄ 2  
2 ⇄ 3  
.  
13 ⇄ 14